

LINCOLN CITY/LANCASTER COUNTY PLANNING STAFF REPORT
for September 29, 2004 PLANNING COMMISSION MEETING

P.A.S.: Change of Zone #04055
Special Permit #04044, North Creek Villas Community Unit Plan

PROPOSAL: To change the zone from H-3, Highway Commercial to R-4, Residential and obtain a special permit for Community Unit Plan for 52 dwelling units.

LOCATION: Generally located south of Fletcher Avenue east of N. 14th Street.

WAIVER REQUEST:

Waive the requirement that lot lines are radial to street
Design Standards for private roadways (slope, concrete curbs)
Allow double frontage lots
Reduce minimum lot depth along a major road
Reduce rear yard setback

LAND AREA: 7 acres, more or less.

CONCLUSION: In conformance with the Comprehensive Plan and Zoning Ordinance and the waivers are justified.

RECOMMENDATION:

Change of Zone

Special Permit

Approval
Conditional Approval

Waive the requirement that lot lines are radial to street	Approval
Modify Design Standards for private roadways (slope, concrete curbs)	Approval
Allow Double frontage lots	Approval
Reduce minimum lot depth along a major road	Approval
Reduce rear yard setback	Approval

GENERAL INFORMATION:

LEGAL DESCRIPTION: See attached.

EXISTING ZONING: H-3, Highway Commercial.

EXISTING LAND USE: Undeveloped.

SURROUNDING LAND USE AND ZONING:

North:	Office, vacant	H-4, Commercial, H-3, Highway Commercial
South:	Residential	R-3, Residential
East:	Residential, vacant	H-4, R-3, H-3
West:	Vacant	H-3, R-3, B-2, Planned Neighborhood Business

HISTORY: Preliminary Plat # 99009 was approved on November 1, 1999 by City Council.

COMPREHENSIVE PLAN SPECIFICATIONS: This area is shown as Commercial (F-25).

"Provide different housing types and choices, including affordable housing, throughout each neighborhood for an increasingly diverse population.

Encourage convenient access to neighborhood services (stores, schools, parks) from residential areas" (F-66)

"Encourage a mix of housing types, single family, townhomes, apartments, elderly housing all within one area.

"Parks and open space within walking distance of all residences.

Multi-family and elderly housing nearest to commercial area." (F-67)

Strategies: Maximize Transit Productivity

"Develop incentives and land development policies promoting mixed-use, high-density development along transit corridors or areas with proximity to existing or future transit service." (F-98)

TOPOGRAPHY: There are no existing tree masses on this parcel.

TRAFFIC ANALYSIS: Fletcher Avenue is shown as an Urban Minor Arterial in the Functional Classification of City Streets in the Comprehensive Plan (F-103).

A future trail is to be located along the south side of Fletcher Avenue, in this location.

AESTHETIC CONSIDERATIONS: The residential units will face each other inside the development and will not face Fletcher Avenue.

ALTERNATIVE USES: Remain H-3, Highway Commercial.

ANALYSIS:

1. This is a request to change the zone from H-3, Highway Commercial to R-4, Residential and to obtain a special permit for Community Unit Plan for 52 dwelling units. The applicant requests to modify design standards for private roadways (inverse

slope and paving standards), waive minimum lot depth, allow double frontage lots and non-radial lot lines, and reduce the rear yard to 10 feet for Blocks 3-5). The applicant indicated in their letter their justification for the waivers.

2. The dwelling units are single family attached and townhouse. The townhouse structures are proposed to be 5-dwelling attached units taking access to internal private roadways.
3. Lots with frontage on Fletcher do not meet the minimum lot depth of 120' and are shown with a depth of approximately 50' which is from the side of the building. Planning staff believes the waiver is justified in order to better utilize the land in the concept shown. The layout causes double frontage lots in Blocks 1 and 6. Planning staff prefers that the development fronts upon itself in order to create a neighborhood feel and thus agrees the waiver is justified. Planning staff also agrees with the request to reduce the rear yard setback to 10 feet for blocks 3-5, as this is a design intended to make full use of the land and the plan includes common open space and a park area.
4. The development meets the Comprehensive Plan goals for pedestrian access by showing all required sidewalks and added sidewalk extensions from the private roadways to the future trail location on Fletcher Avenue. Staff encouraged the developer to show these extensions and complements the site plan for including the added pedestrian access points.
5. With the exception of this lot, the land south of Fletcher is largely zoned residential, while the land north of Fletcher is commercial. Allowing residential in this location would continue the residential designation south of Fletcher Avenue.
6. Public Works and Utilities Department had several comments which are included in their attached memo. Public Works and Utilities Department did not indicate opposition to the waivers of slope, non-radial lot lines and curb on Silver Brook, Haswell, Mad Creek and Sharps Dale Drives.
7. The Lincoln Lancaster County Health Department had three advisory comments which are attached.
8. The Fire Department did not note any hydrants on the site plan and will need a revised copy of the site plan showing fire hydrant locations.
9. The 911 Communications Center indicated that there are several existing street names which are similar to the proposed street names, which may cause confusion during emergency situations. Alternate street names are requested.

10. The site plan leaves portions of lots which must be subdivided off when final plats are submitted to the Planning Department. (Advisory for the applicant)

CONDITIONS:

Site Specific:

1. After the applicant completes the following instructions and submits the documents and plans to the Planning Department office and the plans are found to be acceptable, the application will be scheduled on the City Council's agenda:

- 1.1 Revise the site plan to show:

- 1.1.1 Provide a lot area table
 - 1.1.2 Show minimum openings along the outlot.
 - 1.1.3 Revisions to the satisfaction of the Public Works and Utilities Department.
 - 1.1.4 Revisions to the satisfaction of the Fire Department.
 - 1.1.5 Utility Easements as requested by Lincoln Electric System.
 - 1.1.6 Street names that do not duplicate or sound similar to existing streets.
 - 1.1.7 Correct title of outlots so they begin with the letter A.
 - 1.1.8 Correct notes to reflect appropriate outlot title.
 - 1.1.9 Revise General Note #2 to remove duplicate language.
 - 1.1.10 Revise site specific notes to refer to park as private.

- 1.2 Revise the Landscape plan to show:

- 1.2.1 Revisions to the satisfaction of the Parks and Recreation Department.

2. This approval permits 52 dwelling units and modifies design standards for private roadways (inverse slope and curb standards for Silver Brook, Haswell, Mad Creek and Sharps Dale Drives), waives minimum lot depth, allows double frontage lots and non-radial lot lines, and reduces the rear yard to 10 feet for Blocks 3-5).

General:

3. Before receiving building permits:

- 3.1 The permittee shall have submitted a revised and reproducible **final** plan including 6 copies and the plans are acceptable.
 - 3.2 The construction plans shall comply with the approved plans.

3.3 Final Plats shall be approved by the City.

STANDARD CONDITIONS:

4. The following conditions are applicable to all requests:

- 4.1 Before occupying the dwelling units all development and construction shall have been completed in compliance with the approved plans.
- 4.2 All privately-owned improvements shall be permanently maintained by the owner or an appropriately established homeowners association approved by the City Attorney.
- 4.3 The site plan accompanying this permit shall be the basis for all interpretations of setbacks, yards, locations of buildings, location of parking and circulation elements, and similar matters.
- 4.4 This resolution's terms, conditions, and requirements bind and obligate the permittee, its successors and assigns.
- 4.5 The applicant shall sign and return the letter of acceptance to the City Clerk within 30 days following the approval of the special permit, provided, however, said 30-day period may be extended up to six months by administrative amendment. The clerk shall file a copy of the resolution approving the special permit and the letter of acceptance with the Register of Deeds, filling fees therefor to be paid in advance by the applicant.

Prepared by:

Becky Horner, 441-6373, rhorer@lincoln.ne.gov
Planner

DATE: September 16, 2004

APPLICANT: EDC
2200 Fletcher Avenue
Lincoln, NE 68521

OWNER: Hampton Development Services, Inc.
3801 Union Drive, Suite 102
Lincoln, NE 68516

CONTACT: Jason Thiellen
(402)438-4014




2002 aerial

Change of Zone #04055 N. 18th St. & Fletcher Ave.

Zoning:


R-1 to R-8	Residential District
AG	Agricultural District
AGR	Agricultural Residential District
R-C	Residential Conservation District
O-1	Office District
O-2	Suburban Office District
O-3	Office Park District
R-T	Residential Transition District
B-1	Local Business District
B-2	Planned Neighborhood Business District
B-3	Commercial District
B-4	Lincoln Center Business District
B-5	Planned Regional Business District
H-1	Interstate Commercial District
H-2	Highway Business District
H-3	Highway Commercial District
H-4	General Commercial District
I-1	Industrial District
I-2	Industrial Park District
I-3	Employment Center District
P	Public Use District

One Square Mile
Sec. 36 T11N R6E



Zoning Jurisdiction Lines

City Limit Jurisdiction

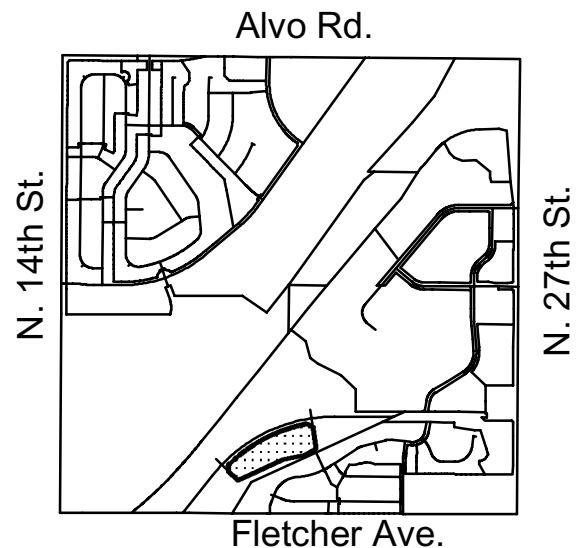

Lincoln City - Lancaster County Planning Dept.



Special Permit #04044 CUP North Creek Villas N. 18th St. & Fletcher Ave.

2002 aerial


Zoning:

R-1 to R-8	Residential District
AG	Agricultural District
AGR	Agricultural Residential District
R-C	Residential Conservation District
O-1	Office District
O-2	Suburban Office District
O-3	Office Park District
R-T	Residential Transition District
B-1	Local Business District
B-2	Planned Neighborhood Business District
B-3	Commercial District
B-4	Lincoln Center Business District
B-5	Planned Regional Business District
H-1	Interstate Commercial District
H-2	Highway Business District
H-3	Highway Commercial District
H-4	General Commercial District
I-1	Industrial District
I-2	Industrial Park District
I-3	Employment Center District
P	Public Use District

One Square Mile
Sec. 36 T11N R6E




Zoning Jurisdiction Lines
City Limit Jurisdiction

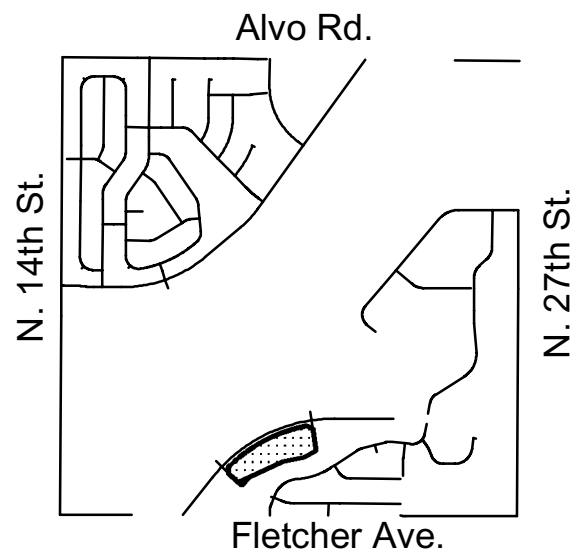

Lincoln City - Lancaster County Planning Dept.


CURVE TABLE					
CURVE	DELTA	ARC LENGTH	RADIUS	CHORD BEARS	CHORD LENGTH
C1	93°17'31"	292.31	1,740.00	S60°08'30"E	291.97
C2	102°22'11"	314.91	1,740.00	S60°08'46"E	314.49
C3	127°17'45"	383.52	1,740.00	S71°37'38"E	382.75
C4	173°46'	568.48	1,740.00	S78°53'32"E	568.56

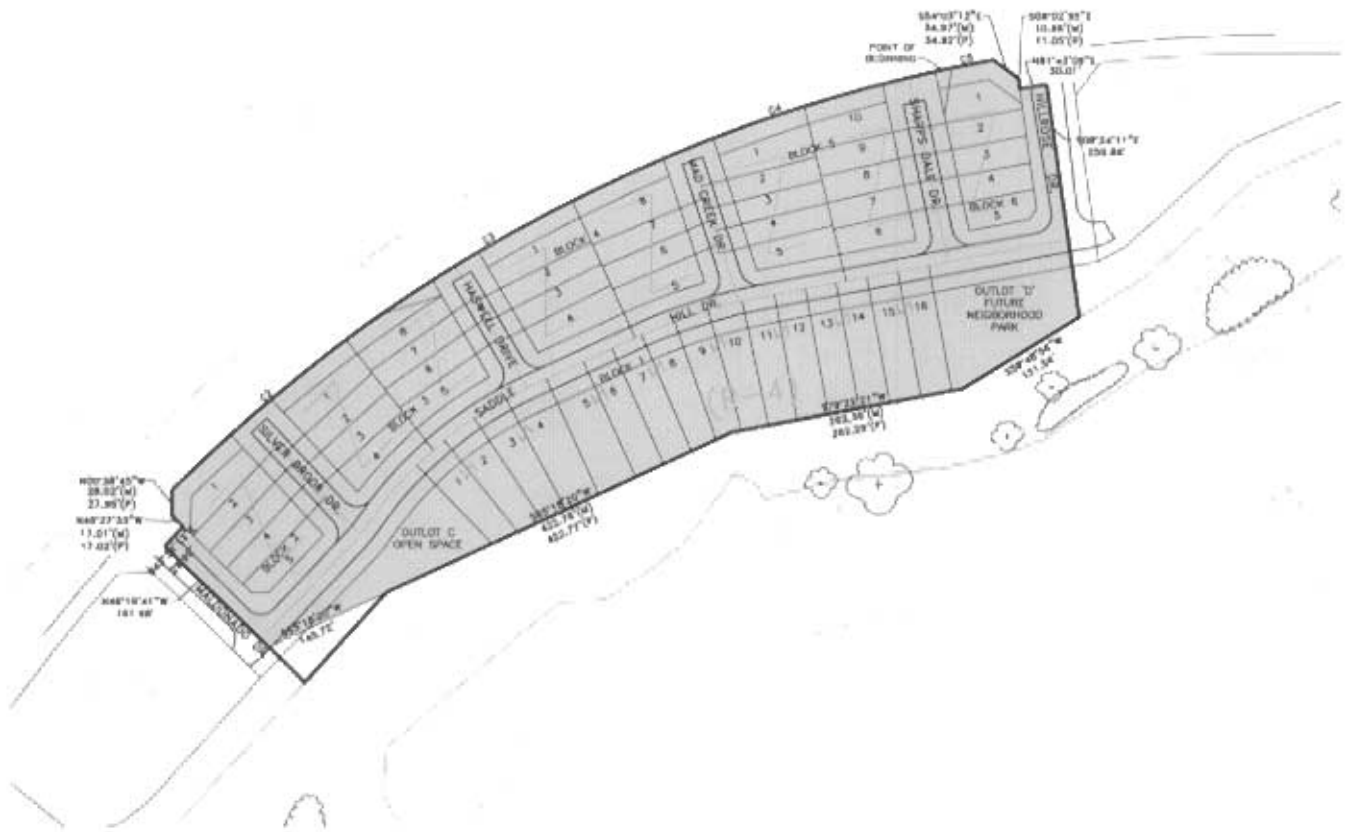

CZ LEGAL DESCRIPTION

A TRACT OF LAND COMPOSED OF LOTS 2 & 3, AND A PORTION OF LOTS 1 & 4, BLOCK 1, NORTH CREEK BUSINESS PARK LOCATED IN THE SOUTHEAST AND SOUTHWEST QUARTERS OF SECTION 36, TOWNSHIP 11 NORTH, RANGE 6 EAST OF THE 6TH P.M., CITY OF LINCOLN, LANCASTER COUNTY, NEBRASKA AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS

BEGINNING AT THE NORTHEAST CORNER OF SAID LOT 3 ALSO BEING ON THE SOUTH RIGHT-OF-WAY LINE OF FLETCHER AVENUE; THENCE ON SAID SOUTH RIGHT-OF-WAY LINE FOR THE NEXT 4 CALLS, EASTERLY ON A 1,740.00 FOOT RADIUS CURVE TO THE RIGHT, AN ARC LENGTH OF 56.57 FEET (LONG CHORD BEARS N78°53'31"E, 56.56 FEET); THENCE S54°03'12"E, 34.97 FEET; THENCE S08°02'55"E, 10.98 FEET; THENCE N81°43'09"E, 30.01 FEET; THENCE S08°24'11"E, 259.86 FEET TO THE SOUTH LINE OF SAID BLOCK 1, THENCE ON THE SOUTH LINE OF SAID BLOCK 1 FOR THE NEXT 4 CALLS, S58°48'56"W, 151.56 FEET; THENCE S79°22'21"W, 262.39 FEET, THENCE S65°18'20"W, 568.48 FEET; THENCE N46°19'41"W, 161.98 FEET TO THE SOUTH RIGHT-OF-WAY LINE OF FLETCHER AVENUE, THENCE ON SAID SOUTH RIGHT-OF-WAY LINE FOR THE NEXT 6 CALLS, THENCE N43°38'13"E, 29.99 FEET; THENCE N46°27'33"W, 17.01 FEET; THENCE N00°38'45"W, 28.02 FEET; THENCE NORTHEASTERLY ON A 1,740.00 FOOT RADIUS CURVE TO THE RIGHT, AN ARC DISTANCE OF 292.32 FEET (LONG CHORD BEARS N50°08'30"E, 291.97 FEET); THENCE NORTHEASTERLY ON A 1,740.00 FOOT RADIUS CURVE TO THE RIGHT, AN ARC DISTANCE OF 314.91 FEET (LONG CHORD BEARS N60°08'46"E, 314.49 FEET); THENCE EASTERLY ON A 1,740.00 FOOT RADIUS CURVE TO THE RIGHT, AN ARC DISTANCE OF 383.52 FEET (LONG CHORD BEARS N71°37'38"E, 382.75 FEET) TO THE POINT OF BEGINNING, CONTAINING 309,619.84 SQUARE FEET (7.11 ACRES), MORE OR LESS.

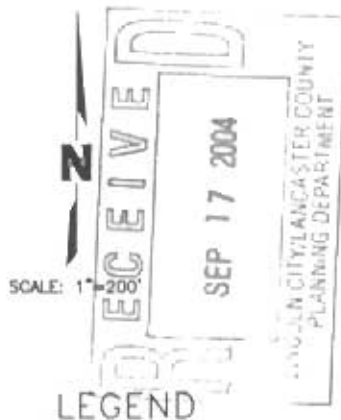


North Creek Villas Change of Zone (H-3 TO R-4) Lincoln, Nebraska

Drawn By: CNS
Dwg.: Pp-change-zone
Date: 09/02/04
Job#: 04-009

SHEET
1 OF 1

CURVE	DELTA	ARC LENGTH	RADIUS	BKWD BEARING	CHORD LENGTH
C1	9°37'32"	292.32'	1740.00'	S50°08'30"W	291.97'
C2	10°22'11"	314.91'	1740.00'	S80°08'46"W	314.49'
C3	12°37'44"	383.52'	1740.00'	S71°37'38"W	382.75'
C4	17°31'58"	56.37'	1740.00'	S78°53'32"W	56.36'

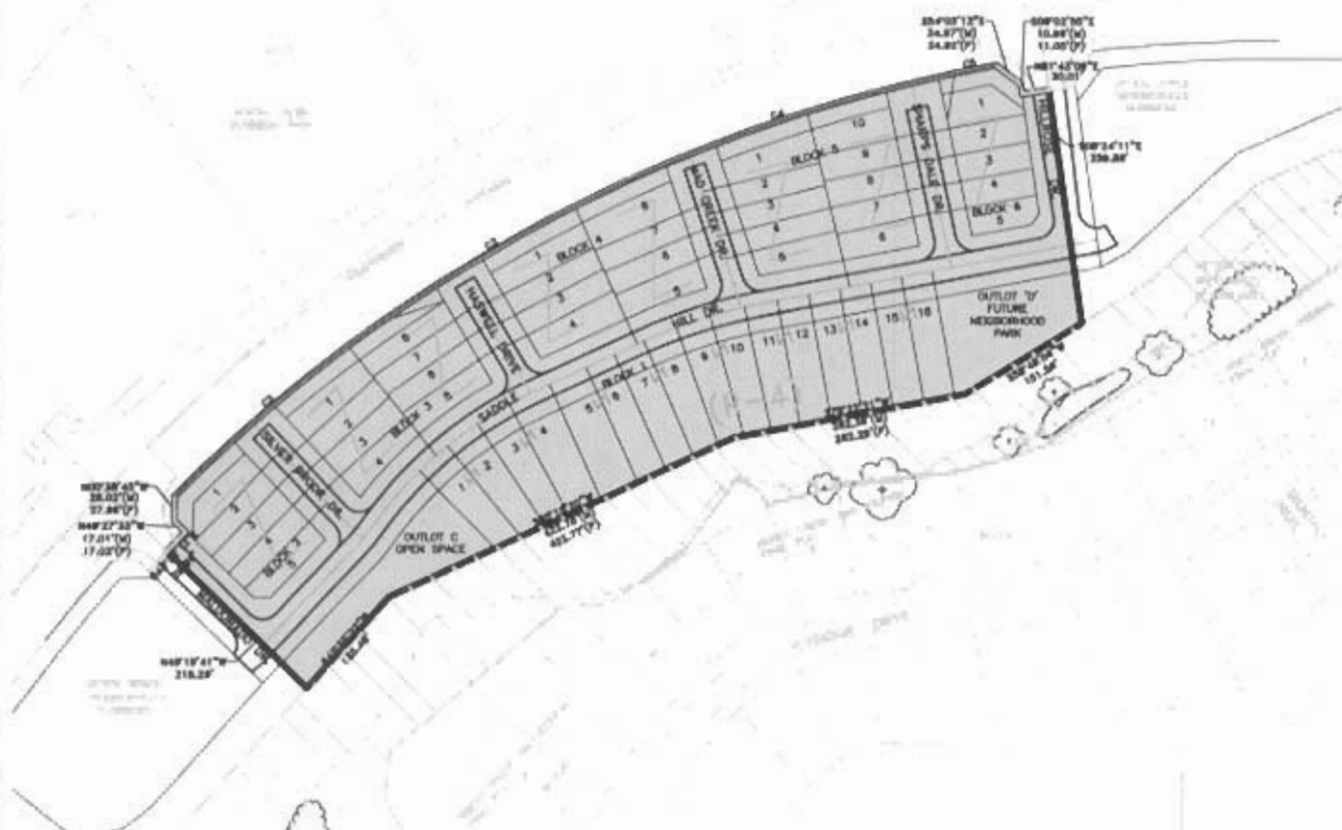

LEGEND

H-3 TO R-4

CUT LEGAL DESCRIPTION

A TRACT OF LAND COMPOSED OF LOTS 2 & 3, AND A PORTION OF LOTS 1 & 4, BLOCK 1, NORTH CREEK BUSINESS PARK LOCATED IN THE SOUTHEAST AND SOUTHWEST QUARTERS OF SECTION 36, TOWNSHIP 11 NORTH RANGE 6 EAST OF THE 6TH P.M., CITY OF LINCOLN, LANCASTER COUNTY, NEBRASKA AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT THE NORTHEAST CORNER OF SAID LOT 3 ALSO BEING ON THE SOUTH RIGHT-OF-WAY LINE OF FLETCHER AVENUE, THENCE ON SAID SOUTH RIGHT-OF-WAY LINE FOR THE NEXT 4 CALLS, EASTERLY ON A 1,740.00 FOOT RADIUS CURVE TO THE RIGHT, AN ARC LENGTH OF 56.37 FEET (LONG CHORD BEARS N78°53'31"E, 56.36 FEET), THENCE S54°03'12"E, 34.97 FEET, THENCE S08°02'55"E, 10.96 FEET, THENCE N81°43'09"E, 30.01 FEET, THENCE S08°24'11"E, 259.86 FEET TO THE SOUTH LINE OF SAID BLOCK 1; THENCE ON THE SOUTH LINE OF SAID BLOCK 1 FOR THE NEXT 4 CALLS, S58°48'56"W, 151.56 FEET, THENCE S79°22'21"W, 262.39 FEET, THENCE S63°18'20"W, 422.76 FEET, THENCE S42°35'22"W, 135.48 FEET, THENCE N46°19'41"W, 218.26 FEET TO THE SOUTH RIGHT-OF-WAY LINE OF FLETCHER AVENUE, THENCE ON SAID SOUTH RIGHT-OF-WAY LINE FOR THE NEXT 6 CALLS, N43°38'13"E, 29.99 FEET, THENCE N46°77'33"W, 17.01 FEET, THENCE N00°38'45"W, 28.02 FEET, THENCE NORTH-EASTERLY ON A 1,740.00 FOOT RADIUS CURVE TO THE RIGHT, AN ARC LENGTH OF 292.32 FEET (LONG CHORD BEARS N50°08'30"E, 291.97 FEET), THENCE NORTHEASTERLY ON A 1,740.00 FOOT RADIUS CURVE TO THE RIGHT, AN ARC LENGTH OF 314.91 FEET (LONG CHORD BEARS N60°08'46"E, 314.49 FEET), THENCE EASTERLY ON A 1,740.00 FOOT RADIUS CURVE TO THE RIGHT, AN ARC LENGTH OF 383.52 FEET (LONG CHORD BEARS N71°17'38"E, 382.75 FEET) TO THE POINT OF BEGINNING (CONTAINING 313,430.14 SQUARE FEET (7.20 ACRES) MORE OR LESS.




North Creek Villas Change of Zone (H-3 TO R-4) Lincoln, Nebraska

Drawn By: CNS
Dwg.: Pp-change-zone
Date: 09/02/04
Job#: 04-009

SHEET
1 OF 1



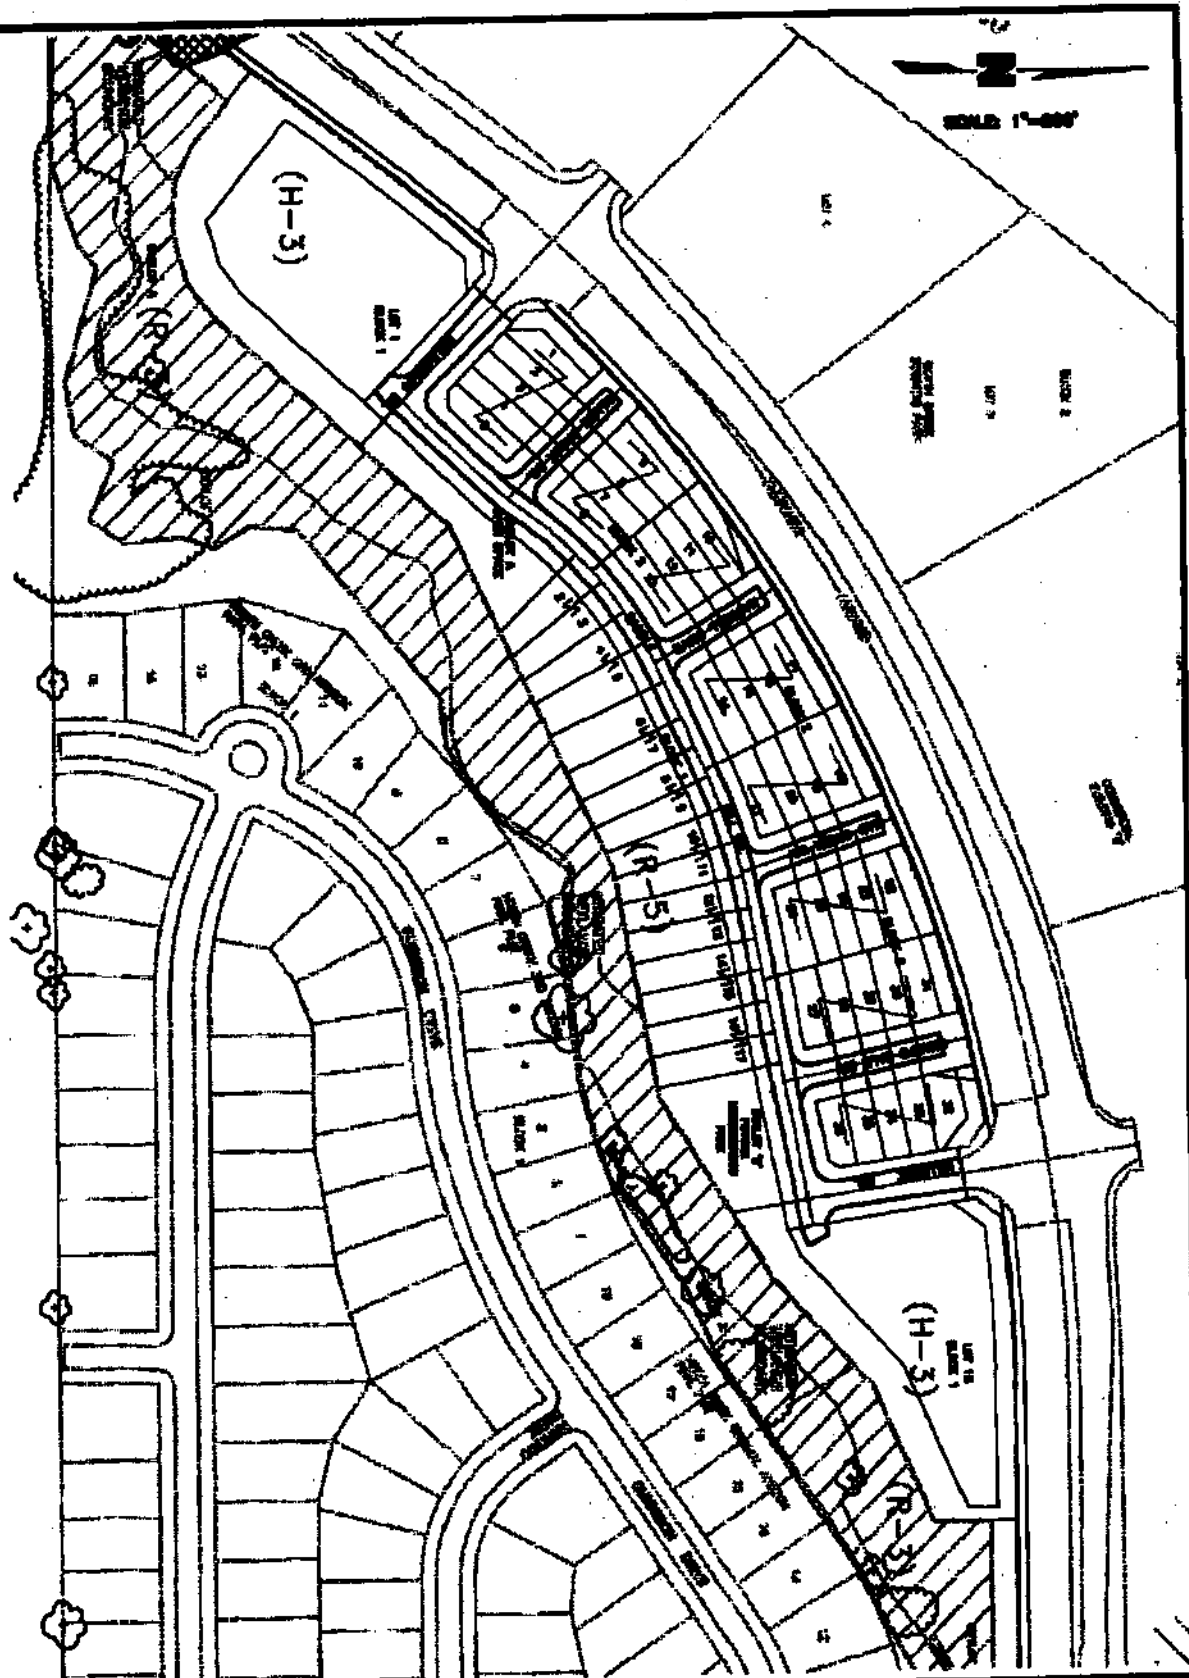

LEGEND

Existing Trees

North Creek Villas
Existing Trees Exhibit
Lincoln, Nebraska

Drawn By: CNS
Dwg.: Pp-site-extrees
Date: 08/30/04
Job#: 04-048

SHEET
1 OF 1






Engineering Design Consultants

2200 Fletcher Ave.
Suite 102
Lincoln, NE 68521
Ph 402-438-4014
Fx 402-438-4026

September 7, 2004

Rebecca Horner
Planning Department
City-County Building
555 South 10th Street
Lincoln, NE 68508

RE: North Creek Villas
Community Unit Plan
EDC Job #04-048-25



Dear Becky,

On behalf of Engineering Design Consultants (EDC), client, Lincoln North Creek L.L.C, we hereby submit the following applications for review per the subdivision application process.

1. Application for a Community Unit Plan.
2. Application for a Change of Zone from H-3 to R-4 (See zoning exhibit).


The Community Unit Plan includes the following:

1. Lots, Blocks, and Use for the CUP are as follows:
 - a. Lots 1 – 16, Block 1 – Single Family/Attached Single Family.
 - b. Lots 1 – 5, Block 2 – Townhouse.
 - c. Lots 1 – 8, Block 3 – Townhouse.
 - d. Lots 1 – 8, Block 4 – Townhouse.
 - e. Lots 1 – 10, Block 5 – Townhouse.
 - f. Lots 1 – 8, Block 6 – Townhouse.
 - g. Outlot 'C' – Open Space.
 - h. Outlot 'D' – Future Neighborhood Park
2. On street parking will be permitted along the north side of Saddle Hill Drive and in front of Outlots 'C' and 'D' only.
3. Direct vehicular access is relinquished to Fletcher Avenue except where shown.
4. Direct vehicular access is relinquished to Saddle Hill Drive for Lot 5, Block 2, Lots 4 and 5, Block 3, Lots 4 – 5, Block 4, Lots 5 – 6, Block 5, and Lot 5, Block 6.
5. Direct vehicular access is relinquished to Maldonado Drive for Lots 1 – 5, Block 2.
6. Direct vehicular access is relinquished to Hillrose Drive for Lots 1 – 5, Block 6.

7. Saddle Hill Drive, Sharps Dale Drive, Mad Creek Drive, Haswell Drive, Silver Brook Drive, Maldonado Drive, and Hillrose Drive are proposed private roadways.
8. The bike path is proposed along the south side of Fletcher Avenue as a continuation of the bike path already in place along the south side Fletcher Avenue.

Waivers for the North Creek Villas Community Unit Plan are as follows:

9. A waiver to Section 26.23.140 of Title 26, of the City of Lincoln Subdivision Regulations requiring lot lines to be radial to a street is requested to allow non-radial lot lines for Lots 1 – 5, Block 2, Lots 1 – 8, Block 3, Lots 1 – 8, Block 4, Lots 1 – 10, Block 5, and Lots 1 – 5, Block 6, for Attached Single Family units.
10. A waiver to Title 2, Section 3.6.1, of the City of Lincoln Design Standards requiring private roadways with no medians to have a transverse slope (crown) of 3 % from the gutter line to the roadway centerline is requested for Silver Brook Drive, Haswell Drive, Mad Creek Drive, and Sharps Dale Drive, to allow private roadway service to Lots 1 – 5, Block 2, Lots 1 – 8, Block 3, Lots 1 – 8, Block 4, Lots 1 – 10, Block 5, and Lots 1 – 5, Block 6, with an inverse slope (crown) of 3 % from the gutter line to the roadway centerline to drain water away from the units.
11. A waiver to Title 2, Section 3.6.2, of the Lincoln Design Standards requiring concrete curbs on both sides of all roadways is requested for Silver Brook Drive, Haswell Drive, Mad Creek Drive, and Sharps Dale Drive due to the amount of driveways located on the roadways making a curb impractical.
12. A waiver for Section 27.17.080 of Title 27, of the City of Lincoln Zoning Regulations that requires a rear-yard setback smaller of 30 feet or 20% of the depth on lots located in the R-4 zone is requested to reduce the rear-yard setback requirement to 10 feet for Lots 1 – 8, Block 3, Lots 1 – 8, Block 4, and Lots 1 – 10, Block 5, to allow for the necessary build able area for the condos. The development is proposing to create a dense yet individual condo layout giving the owner not only a chance interaction with their neighbors but also the privacy that individual lots owners desire.
13. A waiver for Section 26.23.140 of Title 26 to allow for double frontage lots for Lots 1 – 5, Block 2 and Lots 1 – 5, Block 6 is requested. Access has been relinquished to Maldonado Drive and Hillrose Drive and the lots will take access to Silver Brook Drive and Sharps Dale Drive to be consistent with the design concept for the Townhouse area in the development to take access to private roadways between each set of units.
14. A waiver for Section 26.23.140 of Title 26 to waive the minimum lot depth of 120 feet for lots abutting major roadways for Lot 1, Block 2, Lots 1 and 8, Block 3, Lots 1 and 8, Block 4, Lots 1 and 10, Block 5, and Lot 1, Block 6. Access has been relinquished to Fletcher Avenue, Maldonado Drive, Hillrose Drive, and Saddle Hill Drive to be consistent with the design concept for the Townhouse area in the development to take access to private roadways between each set of units.



North Creek Villas
Community Unit Plan
EDC Job #04-048-25
September 7, 2004
Page 3

If you have any additional questions or concerns please contact me at 438-4014 or at jthiellen@edc-civil.com.

Sincerely,


ENGINEERING DESIGN CONSULTANTS, L.L.C.



Jason M. Thiellen
Land Planner

Enclosed:
8 Sets of Sheets 1 – 5
13 copies of Sheet 2
Change of Zone Exhibit
Check for \$2020.00

c: Bob Lewis

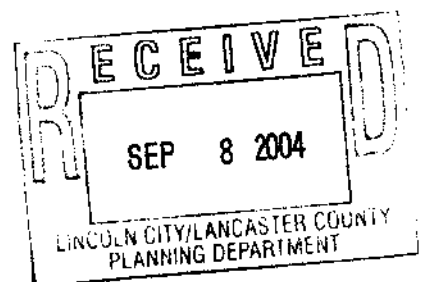

Memorandum

To:	Becky Horner, Planning Department
From:	Chad Blahak, Public Works and Utilities
Subject:	North Creek Villas
Date:	August 31, 2004
cc:	Randy Hoskins

Engineering Services has reviewed the North Creek Villas Special Permit, located south of Fletcher Avenue and west of Telluride Drive, and has the following comments:

Sanitary Sewer - The following comments need to be addressed.

- (1.1) The easement for the portion of the sanitary sewer east of Hillrose Drive is shown as 20' wide. Design standards require a 30' wide easement centered on the pipe. The utility plan needs to be revised accordingly.
- (1.2) As shown, a waiver of design standards would need to be requested and justified for sanitary sewer and water main location. Design standards require that both sanitary sewer and water mains be located 3.5' from the back of curb. Public Works would not support this waiver of design standards as there does not appear to be sufficient physical reason to locate the sanitary and water in non standard locations. The plans need to be revised to show the sanitary sewer and water main 3.5' outside the edge of the paving on the appropriate sides of the streets.

Water Mains - The following comments need to be addressed.

- (2.1) See item (1.2) above.

Grading/Drainage - The grading plan is satisfactory.

Streets - The following comments need to be addressed.

- (4.1) Some form of permanent turnaround needs to be addressed at the ends of Silver Creek, Haswell, Mad Creek, and Sharpsdale Drive.

- ~~(4.2) Public Works does not approve the requested waiver of design standards for sidewalks on both sides of private streets. Sidewalks should be shown on~~

both sides of all private streets. Also, a sidewalk connection from Silver Creek, Haswell, Mad Creek, and Sharpsdale Drive to the sidewalk along Fletcher Avenue needs to be shown. The submittal letter references the Comprehensive Plan's intent to create more compact residential designs as justification for the waivers. Public Works agrees with this concept but not at the expense of multiple design standards.

General - The information shown on the preliminary plat relating to the public water main system, public sanitary sewer system, and public storm sewer system has been reviewed to determine if the sizing and general method providing service is satisfactory. Design considerations including, but not limited to, location of water main bends around curves and cul-de-sacs, connection of fire hydrants to the public main, temporary fire hydrant location, location and number of sanitary sewer manholes, location and number of storm sewer inlets, location of storm sewer manholes and junction boxes, and the method of connection storm sewer inlets to the main system are not approved with this review. These and all other design considerations can only be approved at the time construction drawings are prepared and approved.

Memo



To: Becky Horner, Planning Department

From: Mark Canney, Parks & Recreation

Date: August 17, 2004

Re: North Creek Village

Staff members of the Lincoln Parks and Recreation Department have conducted a plan review of the above-referenced application/proposal and the following comments:

1. Outlot "A" is not an acceptable park location. Neighborhood park location is Keech Park.
2. All outlot areas to be maintained by the developer and/or future homeowner's association.
3. Impact fees to be collected in lieu of park land.
4. Outdoor recreation plan may be waived due to availability of open space in backyards.
5. A cross section of Fletcher with a minimum separation of 10' between the curb and the trail, including street tree needs to be provided.

If you have any additional questions, comments or concerns, please feel free to contact me at 441-8248. Thank you.

Richard J Furasek
08/17/2004 11:11 AM

To: Rebecca D Horner/Notes@Notes
cc:
Subject: North Creek Villas

Upon review of Special Permit # 04044 and CZ# 04055, I was not able to find any fire hydrants on this site map. If I could get a utilities map, it would be helpful. Thanks.


Richard J. Furasek
Assistant Chief Operations
Lincoln Fire & Rescue
1801 Q Street
Lincoln Ne. 68508
Office 402-441-8354
Fax 402-441-8292

message to Becky Horner

INTER-DEPARTMENT COMMUNICATION



DATE: August 16, 2004
TO: Becky Horner, City Planning
FROM: Sharon Theobald
Ext 7640
SUBJECT: DEDICATED EASEMENTS - Special Permit #04044
DN# 60N-22E



Attached is the C.U.P. for North Creek Villas.

In reviewing the dedicated transmission line or other electrical easements shown on this plat, LES does not warrant, nor accept responsibility for the accuracy of any such dedicated easements.

ALLTEL, Time Warner Cable, and the Lincoln Electric System will require the additional easements marked in red on the map. Also, please show the existing easement which is highlighted in green.

It should be noted, any relocation of existing facilities will be at the owner/developer's expense.

Sharon Theobald

ST/ss
Attachment
c: Terry Wiebke
Easement File

IMPORTANT

Return this report with two sets of corrected plans. The corrections noted below are required to be made to the plans prior to issuance of a permit. Please indicate under each item where the correction is made by plan sheet number or plan detail number.

A separate set of plans for review and final approval must be submitted by the licensed installing contractor/s if fire suppression systems, sprinklers, dry powder, fire alarm systems or underground tanks are installed.

Permit # **DRF04117**

Address

Job Description: **Development Review - Fire**

Location: **NORTH CREEK VILLAS**


Special Permit: **Y 04044**

Preliminary Plat:

Use Permit:

CUP/PUD:

Requested By **BECKY HORNER**

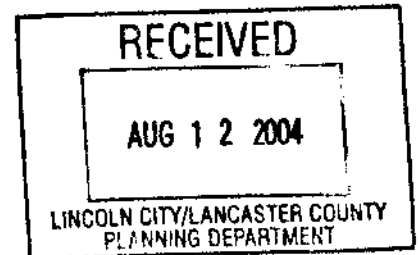

Status of Review: **Denied**

08/12/2004 1:25:24 PM

Reviewer: **FIRE PREVENTION/LIFE SAFETY CODE**

BOB FIEDLER

Comments: **need site utility plan showing fire hydrants**

Current Codes In Use Relating to Construction Development in the City of Lincoln:

2000	International Building Code and Local Amendments
2000	International Residential Code and Local Amendments
1994	Nebraska Accessibility Guidelines (Patterned after and similar to ADA guidelines)
1989	Fair Housing Act As Amended Effective March 12, 1989
1979	Zoning Ordinance of the City of Lincoln as Amended including 1994 Parking Lot Lighting Standards
1992	Lincoln Plumbing Code (The Lincoln Plumbing Code contains basically the 1990 National Standard Plumbing Code and local community Amendments.)
1999	National Electrical Code and Local Amendments
1997	Uniform Mechanical Code and Local Amendments
1994	Lincoln Gas Code
2000	NFPA 101 Life Safety Code
2000	Local Amendments International Firecode
	Applicable NFPA National Fire Code Standards



Dennis L Roth

08/10/2004 10:04 PM

To: Rebecca D Homer/Notes@Notes

cc:

Subject: re: North Creek Villas

PROJ NAME: North Creek Villas
PROJ NMBR: SP #04044, CZ #04055
PROJ DATE: 08/09/2004
PLANNER: Becky Homer

Finding THREE DUPLICATE/SIMILAR NAME in our geobase for the street name proposed in this project, other than those which are an extension of an existing street.

PROPOSED

Sharps Dale Dr
Hillrose Dr
Saddle Hill Dr

EXISTING

Scottsdale Ln
Melrose Ave
Saddlehorn RD

MOST STRONGLY RECOMMEND ALTERNATE names be selected. For the record, the names Saddle Creek and Saddle View have already been used.

Dennis "denny" Roth, ESD II/CAD Admin
Emergency Communications 9-1-1 Center

STREETS: Haswell Dr, Hillrose Dr, Mad Creek Dr, Maldonado Dr, Sharps Dale Dr, Silver Brook Dr,

PRIVATE: Fletcher Av and Gunnison Dr

COMMENTS:

message to Becky Homer

**LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
INTER-OFFICE COMMUNICATION**

TO: Becky Horner

DATE: August 23, 2004

DEPARTMENT: Planning

FROM: Chris Schroeder

ATTENTION:

DEPARTMENT: Health

CARBONS TO: EH File

SUBJECT: North Creek Villas

EH Administration

SP #04044 CZ #04055

The Lincoln-Lancaster County Health Department has reviewed the proposed development with the following noted:

- The LLCHD advises that noise pollution can be an issue when locating residential zoning adjacent to commercial zoning.
- Lincoln Municipal Code (LMC) 8.24 Noise Control Ordinance does address noise pollution by regulating source sound levels based upon the receiving land-use category or zoning. However, the LLCHD does have case history involving residential uses and abutting commercial uses in which the commercial source does comply with LMC 8.24, but the residential receptors still perceive the noise pollution as a nuisance. The LLCHD strongly advises the applicant to become familiar with LMC 8.24. The LLCHD advises against locating loading docks, trash compactors, etc. adjacent to residential zoning. Therefore, creative site design should be utilized to locate potential sources of noise pollution as far as possible from residential zoning.
- During the construction process, the land owner(s) will be responsible for controlling off-site dust emissions in accordance with Lincoln-Lancaster County Air Pollution Regulations and Standards Article 2 Section 32. Dust control measures shall include, but not limited to application of water to roads, driveways, parking lots on site, site frontage and any adjacent business or residential frontage. Planting and maintenance of ground cover will also be incorporated as necessary.